



MILTECH™ 912

Compact, Portable Military Managed Gigabit Ethernet Switch

FEATURES

Driven by rapid advancement and lower costs, Ethernet is becoming the standard for IP-based components in a wide range of military and commercial applications, including:

- Vetronics
- Manned and unmanned vehicles
- Aerial environments

The 912 is a MIL-STD, fully managed military grade network switch offering 12 triple-speed (10/100/1000Mbps) connections. It can be remotely managed to optimize communications and prioritize critical information traffic. Advanced network features, never before found in a package of this size, include switching protocols, virtual LANS (VLANs), traffic prioritization (QoS), and bandwidth aggregation are standard.

With the best combination of size, weight, power and cost (SWaP-C) in the industry, it saves valuable real estate for computers, sensors, targeting systems, and other devices.

The MILTECH912's gigabit speeds and 24VDC power make it instantly compatible with any network device and power systems in these mobile platforms.

The MILTECH912 is widely used in battlefield communications C4ISR, video, sensor data acquisition and transmission. Its mechanical packaging enhancements, including two ruggedized D38999 circular connectors, is designed for MIL-STD-810F airborne and ground environmental compliance and high reliability. Leveraging best-in-class switching technology from Techaya, the MILTECH912 serves as a robust commercial off-the-shelf (COTS) solution for rugged LAN connectivity.

SPECIFICATIONS

ETHERNET PORTS	<ul style="list-style-type: none"> • Managed 12 x switched 10/100 /1000 ports
NETWORKING	<ul style="list-style-type: none"> • Spanning Tree (802.1d), RSTP (802.1w) and multiple Spanning Tree (802.1S) for fast recovery rings • Security via Radius Authentication 802.1x, Port Security, Port Mirroring • Multicasting (IGMP Snooping), GARP, GMRP, and GVRP Broadcasting and flooding Control up to 8K Groups. • 802.1q Tagged based VLAN up to 4K VLAN groups. • QoS Multi-Layer Classifier, 802.1p, ToS/DSCP traffic classification. WFQ, Strict Queuing. • Bridge support for Q-in-Q. • Link Aggregation 802.3AD. • WEB, CLI, Telnet Management. • L2 switching IPv6 support
CONNECTORS	<ul style="list-style-type: none"> • Power Connector Type: Power – D38999/24TB35PN • LAN Connector Type: D38999/24TF35PN • LED Indication Per Port (Speed, Link/Activity)
CHASSIS	<ul style="list-style-type: none"> • Machined rugged aluminum • Conductively cooled w/custom internal heat-sinks • Ingress protection against sand, dust and moisture • Anodize Coating, MIL-A-8625, Type II, Class 2
STANDARDS	<ul style="list-style-type: none"> • MIL-STD-461E, MIL-STD-810F GM, IP67, MILSTD-1275, MILSTD-704
VOLTAGE OPERATION	<ul style="list-style-type: none"> • Nominal 24VDC (16~36)
PERFORMANCE	<ul style="list-style-type: none"> • 26.8 Mpps wire speed forwarding rate • 52 Gbps maximum forwarding bandwidth • 8K MAC Address







MILTECH™ 912

Compact, Portable Military Managed Gigabit Ethernet Switch

SPECIFICATIONS

STANDARDS COMPLIANCE	<ul style="list-style-type: none"> IEEE 802.1x MAC based Authentication IEEE 802.1Q Vlan Tagging IEEE 802.1P QoS IEEE 802.1S Multiple STP IEEE 802.1W Rapid STP IEEE 802.1AD Link Aggregation IEEE 802.1X
POWER	<ul style="list-style-type: none"> MIL-STD-1275B Surge and Spike protection Voltage Input: 24Vdc Nominal (18-32V) Power Consumption: 7W Typical Chassis grounding
ELECTROMAGNETIC	<ul style="list-style-type: none"> MIL-STD-461E Electromagnetic compatibility CE-102, CS-114, CS-115, CS-116, RE-102, RS-103
ENVIRONMENTAL	<ul style="list-style-type: none"> MILSTD-810F/G/GM: Random vibration (514.5I), Bench Handling (516.6VI), High Temp.(501.5I,II), Low Temp.(502.5I), Humidity (507.5II), Air Pressure (500.5I,II), Blowing Rain (506.5I), Immersion (512.5I), Salt Atmosphere (509.5I), Blowing Dust (510.5I), Loose Cargo Vibration (514.6II), Wind Analysis. IP67
PHYSICAL	<ul style="list-style-type: none"> Dimensions: 178mm(L) x 136mm(W) x 44.4mm(H), including connectors Weight: 1.050 kg Dimensions: 7.1”(L) x 5.4”(W) x 1.8”(H), including connectors
INSTALLATION	<ul style="list-style-type: none"> Set of four 4-40 threads for mounting to any flat surface.
COOLING	<ul style="list-style-type: none"> No Moving Parts. Passive Cooling.
OPERATING TEMP	<ul style="list-style-type: none"> -40°C to +85°C (-40°F to +185°F) Cold Start-Up
STORAGE TEMP	<ul style="list-style-type: none"> -45°C to +85°C (-49°F to +185°F)

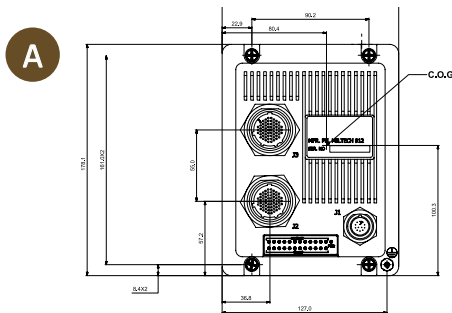

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
MILTECH912	<ul style="list-style-type: none"> MILTECH912, military Rugged, 12 x 10/100/1000TX, Managed Switch
CBL912-PWR	<ul style="list-style-type: none"> Power cable MILTECH912, MIL-D38999 Connector, 3 meter length
CBL908MP-LAN	<ul style="list-style-type: none"> LAN cable for MILTECH912, MIL-D38999 to 8xRJ45 connector, 3 Meters length
CBL912-LAN-MNG	<ul style="list-style-type: none"> LAN cable for MILTECH912, MIL-D38999 to 4xRJ45 & DB9 connector, 3 Meters length