



MILTECH™ 928

Military Avionic Managed Gigabit Switch

PRODUCT DESCRIPTION

MILTECH928 is a MIL-STD, fully managed military grade network switch offering 8 triple-speed (10/100/1000Mbps) ports equipped with ruggedized RJ 45 connectors.

The MILTECH 928 can be remotely managed to optimize communications and prioritize critical information traffic. Advanced network features, include switching protocols, virtual LANS (VLANs), traffic prioritization (QoS), and band width aggregation are standard.

The MILTECH 928's gigabit speeds and 24VDC power make it instantly compatible with network device and power systems.

The MILTECH928 is widely used in battlefield C4ISR, video, sensor data acquisition, and communications. Its mechanical packaging enhancements, including ruggedized RJ45 connectors, is designed for MIL-STD-810F airborne and ground environmental compliance


and high reliability. Leveraging best-in-class switching technology from Techaya, the MILTECH 928 serves as a robust commercial off-the-shelf (COTS) solution for rugged LAN connectivity, which can be used in a wide range of military and commercial applications, including:

- BMS - Battle management systems
- Land autonomous vehicles (UGVs)
- Air-borne Systems
- Mobile equipment fielded in harsh environments

Modern platforms contain dozens of network devices that must be interconnected. The MILTECH 928 is an ideal solution for mobile Ethernet-equipped platforms. It saves valuable real estate for computers, sensors, targeting systems, and other devices that make mobile platforms highly effective.

FEATURES

ETHERNET PORTS:	<ul style="list-style-type: none"> • Managed 8 x switched 10/100 /1000 ports
NETWORKING:	<ul style="list-style-type: none"> • Spanning Tree (802.1d), RSTP (802.1w) and multiple Spanning Tree (802.1S) for fast recovery rings • Security via Radius Authentication 802.1x, Port Security, Port Mirroring • Multicasting (IGMP Snooping), GARP, GMRP, and GVRP Broadcasting and flooding Control up to 8K Groups • 802.1q Tagged based VLAN up to 4K VLAN groups. • QoS Multi-Layer Classifier, 802.1p, ToS/DSCP traffic classification. WFQ, Strict Queuing • Bridge support for Q-in-Q • Link Aggregation 802.3AD • WEB, CLI, Telnet Management
CONNECTORS:	<ul style="list-style-type: none"> • Power connector : Type MIL-D-38999/24WA98PA • LAN connectors : MIL-grade RJ45 - RJFTV series • RS232 connector – SCE2-B-76A06-075N-001 • Led indication: link / activity per port
CHASSIS:	<ul style="list-style-type: none"> • Machined rugged aluminum • Conductively cooled w/custom internal heat-sinks • Ingress protection against sand, dust and moisture • Anodize Coating, MIL-A-8625, Type II, Class 2
STANDARDS:	<ul style="list-style-type: none"> • MIL-STD-1275B MIL-STD-704A MIL-STD-461A MIL-STD-810F GM IP67
VOLTAGE:	<ul style="list-style-type: none"> • Nominal 24VDC (18~32VDC)

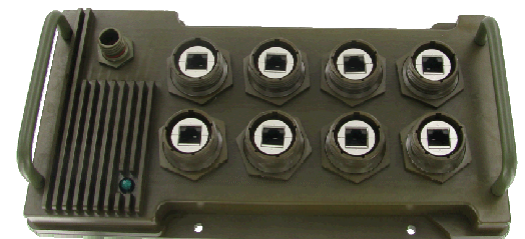






MILTECH™ 928

Military Avionic Managed Gigabit Switch

PRODUCT SPECIFICATIONS

PERFORMANCE:	<ul style="list-style-type: none"> • 26.8 Mpps wire speed forwarding rate • 20Gbps maximum forwarding bandwidth • 8K MAC Address
STANDARDS COMPLIANCE:	<ul style="list-style-type: none"> • IEEE 802.1x MAC based Authentication • IEEE 802.1Q Vlan Tagging • IEEE 802.1P QoS • IEEE 802.1S Multiple STP • IEEE 802.1W Rapid STP • IEEE 802.1AD Link Aggregation • IEEE 802.1X
POWER:	<ul style="list-style-type: none"> • MIL-STD-1275B Surge and Spike protection • Voltage Input: 24Vdc Nominal (18-32V) • Power Consumption: 7W Typical • Chassis grounding
ELECTROMAGNETIC:	<ul style="list-style-type: none"> • MIL-STD-461A Electromagnetic compatibility • RE-02, RS-03
SHOCK/VIBRATION/HUMIDITY:	<ul style="list-style-type: none"> • MIL-STD-810F; 501.4I 501.4II 502.4I 502.4II 507.4 500.4II 514 516I 516VI 514.5 512.4
PHYSICAL:	<ul style="list-style-type: none"> • Dimensions: 287mm(L) x 147mm(W) x 50mm(H), including connectors Weight: 1.1kg • Dimensions: 11.3 "(L) x 5.78"(W) x 1.96"(H)
INSTALLATION:	<ul style="list-style-type: none"> • Set of four #10-32 Captive screws for mounting for mounting to any flat surface
COOLING:	<ul style="list-style-type: none"> • No Moving Parts. Passive Cooling.
OPERATING TEMP:	<ul style="list-style-type: none"> • -40°C to +85°C (-40°F to +185°F) Cold Start-Up
STORAGE TEMP:	<ul style="list-style-type: none"> • -45°C to +85°C (-49°F to +185°F)

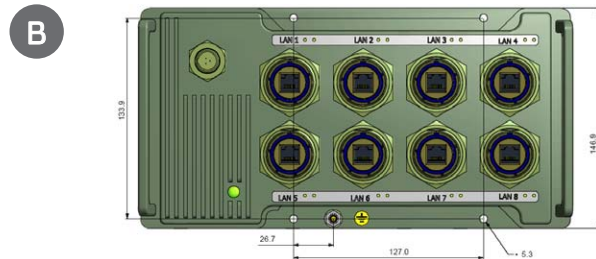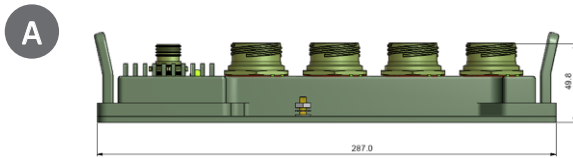

*All measurements are in millimeters

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
MILTECH928	<ul style="list-style-type: none"> • Manage Military Grade Gigabit Switch, 8 x 10/100/1000TX
CBL610-PWR	<ul style="list-style-type: none"> • Power cable MILTECH-610, MIL-D38999 Connector, 3 meter length
CBL928-MNG	<ul style="list-style-type: none"> • Management cable MILTECH-928, MIL-SCE2 Connector, to DB9 3 meter length